

Setting Up the Sound System


- Connect the 2 loose XLR plugs in the CD-Player case to the input terminals on the back of the Amp (#1 in figure).
- Connect the 2 banana plugs at the end of speaker wires to the Amp output terminals (#7 in figure), black wires to black terminals.



XLR



Banana

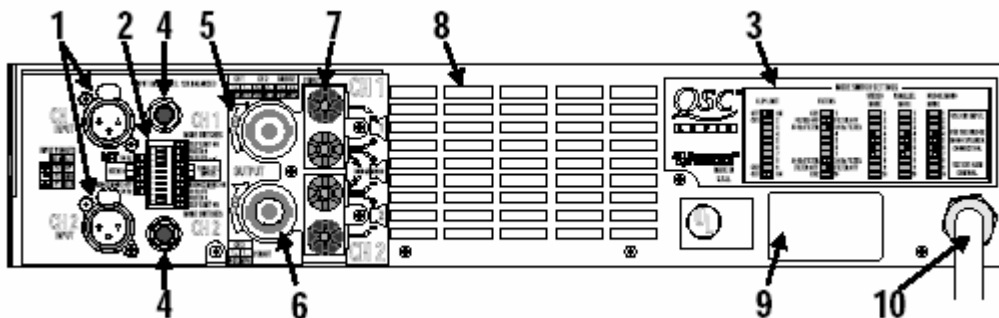

- Connect the other end of speaker wires to speakers
- Connect the CD-Player and the Amp to AC power outlets.
- Turn on the CD player first, the Amp last.

Other useful stuff:

- In order to make the CD players “relay” (one starts when the song playing on the other player ends) do the following:
 - Press the “Fader Start” button in the middle of the unit. The light next to it will turn on.
 - Press the button “SNG” located to the left of each display window. The display will show “Single”, which means each unit will play one song and stop.
- To listen to one CD player (say, CD A) while the other one (say, CD B) is playing do the following:
 - lower the corresponding volume (Ch 1),
 - depress the corresponding monitor button, and play that CD player. You will hear CD A on the headphones, but everyone else will hear CD B. When you are done listening, stop that CD player, and raise its volume.

Packing Up the Sound System

- Turn off the Amp first, the CD player last.
- Disconnect the 2 XLR plugs from the back of the Amp (#1 in figure) and place the wire & plugs in the CD-Player case.
- Disconnect the rest of the wires, and close the cases.